


## A 2

profile rail 30x15 mm, not perforated

profile rail 50x31x3.25 mm, without perforation, slot size 22 mm

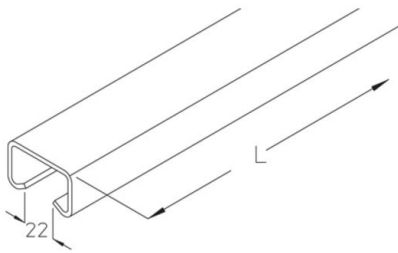

### Bright rolled

Product	H	B	L	t	G
A 2-30B	31 mm	50 mm	3000 mm	3,25 mm	8,8 kg
A 2-60B	31 mm	50 mm	6000 mm	3,25 mm	17,6 kg



### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
A 2-30F	31 mm	50 mm	3000 mm	3,25 mm	9,4 kg
A 2-60F	31 mm	50 mm	6000 mm	3,25 mm	18,8 kg

**H:** height  
**B:** width  
**L:** length  
**t:** material thickness  
**G:** weight

## DETAILS / APPLICATIONS



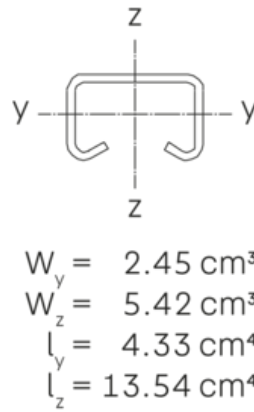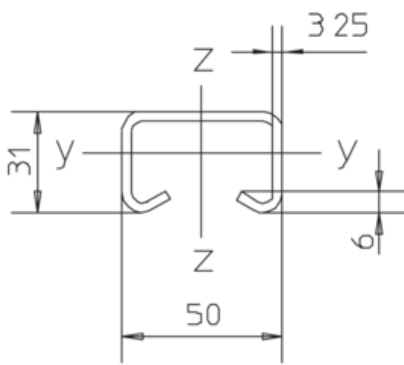

## OPTIONAL ACCESSORIES

HS22, SKS H

