


## A 8

profile rail 40x22 mm, not perforated

profile rail 40x22x2.00 mm, without perforation, slot size 18 mm

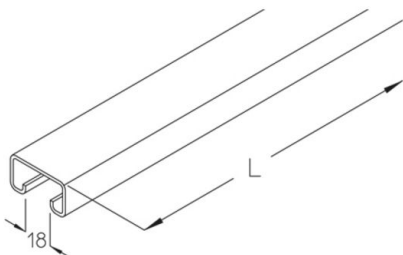

### Bright rolled

Product	H	B	L	t	G
A 8-30B	22 mm	40 mm	3000 mm	2,00 mm	4,6 kg
A 8-60B	22 mm	40 mm	6000 mm	2,00 mm	9,2 kg



### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
A 8-30F	22 mm	40 mm	3000 mm	2,00 mm	5 kg
A 8-60F	22 mm	40 mm	6000 mm	2,00 mm	9,9 kg

**H:** height  
**B:** width  
**L:** length  
**t:** material thickness  
**G:** weight

## DETAILS / APPLICATIONS



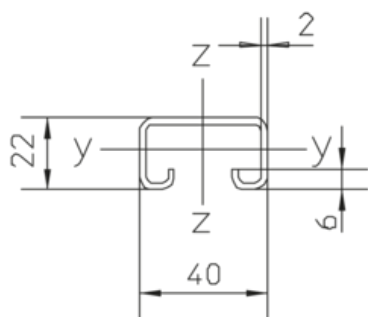

$$\begin{aligned}W_y &= 1.10 \text{ cm}^3 \\W_z &= 2.25 \text{ cm}^3 \\I_y &= 1.34 \text{ cm}^4 \\I_z &= 4.32 \text{ cm}^4\end{aligned}$$

## OPTIONAL ACCESSORIES

SA 1, SAI 21, HS18, AM18, AMF18, ASK 8

