

AV

connector, A/KHA 21/41/42/82

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
AV 41-HDG	42 mm	40 mm	200 mm	6,00 mm	0,72 kg


Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	H	B	L	t	G
AV 41-316	42 mm	40 mm	200 mm	6,00 mm	0,72 kg

H: height
B: width
L: length
t: material thickness
G: weight

DETAILS / APPLICATIONS



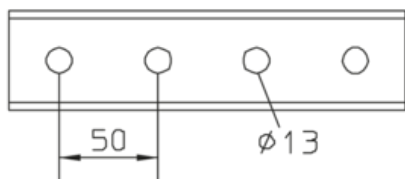

OPTIONAL ACCESSORIES

AMF22, AM22

