


## AVL 60

rail connector 60°



Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	B	L	angle	t	G
AVL-5-60-HDG	40 mm	211,4 mm	-	6,00 mm	0,43 kg


Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	B	L	angle	t	G
AVL-5-60-316	40 mm	211,4 mm	-	6,00 mm	0,43 kg

**B:** width  
**L:** length  
**angle:** angle  
**t:** material thickness  
**G:** weight

## DETAILS / APPLICATIONS



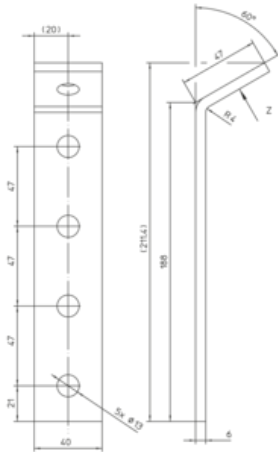

## OPTIONAL ACCESSORIES

SES, AM22, AMF22

