


AVL
rail connector

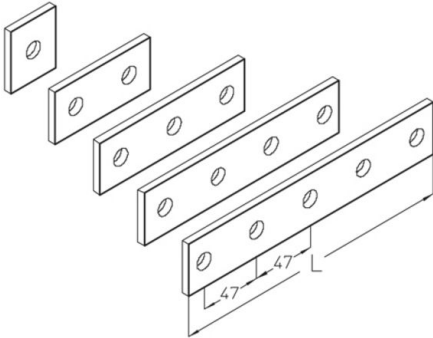

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	B	L	t	G
AVL-1-HDG	40 mm	42 mm	6,00 mm	0,08 kg
AVL-2-HDG	40 mm	89 mm	6,00 mm	0,17 kg
AVL-3-HDG	40 mm	136 mm	6,00 mm	0,25 kg
AVL-4-HDG	40 mm	183 mm	6,00 mm	0,34 kg
AVL-5-HDG	40 mm	230 mm	6,00 mm	0,43 kg


Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	B	L	t	G
AVL-1-316	40 mm	42 mm	6,00 mm	0,07 kg
AVL-2-316	40 mm	89 mm	6,00 mm	0,16 kg
AVL-3-316	40 mm	136 mm	6,00 mm	0,24 kg
AVL-4-316	40 mm	183 mm	6,00 mm	0,33 kg
AVL-5-316	40 mm	230 mm	6,00 mm	0,40 kg

B: width
L: length
t: material thickness
G: weight



DETAILS / APPLICATIONS

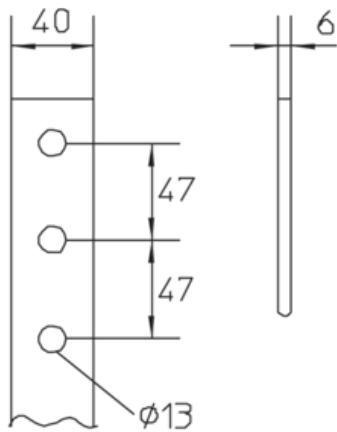

OPTIONAL ACCESSORIES

AM22, AMF22

