


## BODO TL

single-outlet, dry maintained, round, empty

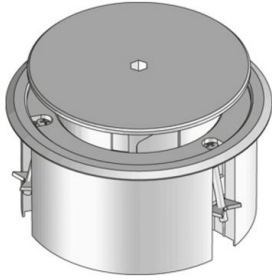

Round single-outlet made of plastic with floor cover protection frame including a pivotable cover with cable outlet and a set of claws. For the installation into screed and raised floor/hollow floor openings. Suitable for rooms with dry-cleaned floor covers. Designed for office traffic loads.

Please mind the technical information in chapter planning.



material	Cover with cable outlet and frame: polyamide
type of assembly	Fixing on floor box UBDHB / rough concrete floor and installation in screed or false floor
application area	dry floor cleaning
protection class	in use IP 20 / not in use IP 30
norm	according to DIN EN 50085
permits	according to VDE / TÜV
loading	including inspection stamp Ø 13 mm: 1.5 kN

### Acrylonitrile-butadiene-styrene copolymer

Product	H	H <sub>min</sub>	B	E	P <sub>max</sub>	color	IP <sub>n</sub>	IP <sub>g</sub>	G
BODO TL-G	87 mm	63 mm	133 mm	122 mm	1,5 kN	RAL 7011 (iron grey)	IP 30	IP 20	0,20 kg
BODO TL-S	87 mm	63 mm	133 mm	122 mm	1,5 kN	RAL 9011 (graphite black)	IP 30	IP 20	0,20 kg

**H:** height

**H<sub>min</sub>:** Minimum installation height

**B:** width

**E:** fitting dimension

**P<sub>max</sub>:** Maximum load

**color:**


**IP<sub>n</sub>:** IP protection level in unused condition

**IP<sub>g</sub>:** IP protection level in used condition

**G:** weight



## DETAILS / APPLICATIONS

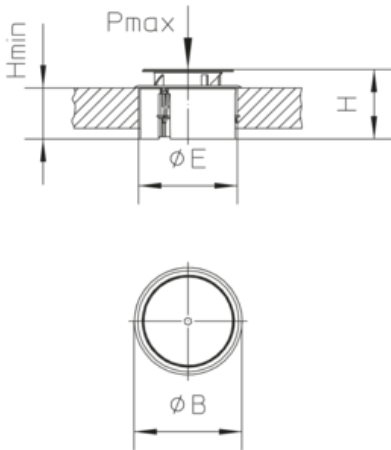

## OPTIONAL ACCESSORIES

UG R, UTG 75, UARM-2-1, UARM-3-1, USK R122, UBDHB 122R, UWZ IS



dry-cleaned

