


# HK 30-70

cable hook

Cable hook galvanized, for provisional laying of cables with a diameter up to 70 mm.

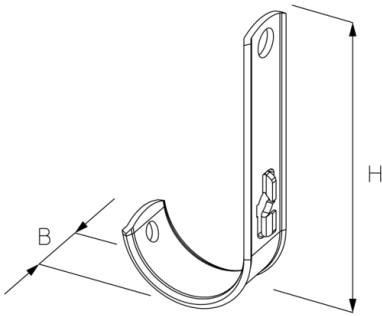

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Product | H      | B     | D       | G           |
|---------|--------|-------|---------|-------------|
| HK 40   | 110 mm | 30 mm | ? 40 mm | 11 kg/100   |
| HK 50   | 130 mm | 30 mm | ? 50 mm | 13,1 kg/100 |
| HK 60   | 150 mm | 30 mm | ? 60 mm | 15,1 kg/100 |
| HK 70   | 170 mm | 30 mm | ? 70 mm | 16,2 kg/100 |

**H:** height  
**B:** width  
**D:** diameter  
**G:** weight

## DETAILS / APPLICATIONS



