


## KDIA-G

adapter for KDI, welded

The KDIA-G is an adapter for the KDI support to reduce the loads on the dowels or to be able to distribute the load between 4 dowels in accordance with the approval.

KDI is placed in KDIA-G. With the KDIA-G, the KDI is fixed directly to the concrete.

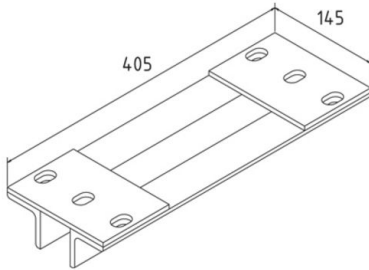


Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)


| Product  | H     | B      | L      | G       |
|----------|-------|--------|--------|---------|
| KDIA-G F | 56 mm | 145 mm | 405 mm | 6,26 kg |


**H:** height  
**B:** width  
**L:** length  
**G:** weight

## DETAILS / APPLICATIONS

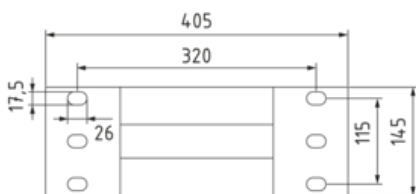

| B<br>mm | L <sub>k</sub><br>mm | F <sub>d</sub> /P |
|---------|----------------------|-------------------|
| 100     | 120                  | 0,4               |
| 200     | 220                  | 0,5               |
| 300     | 320                  | 0,6               |
| 400     | 420                  | 0,7               |
| 500     | 520                  | 0,7               |
| 600     | 620                  | 0,8               |

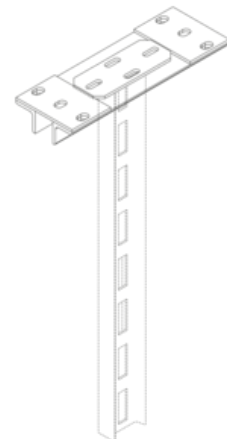

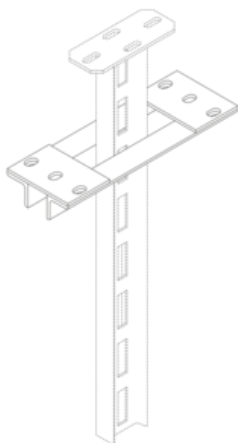

## OPTIONAL ACCESSORIES

KDI

