


# KHA 4

profile rail 48x26 mm, perforated

profile rail 48x26x2.50 mm, with continuous perforation 13x26, slot size 22 mm


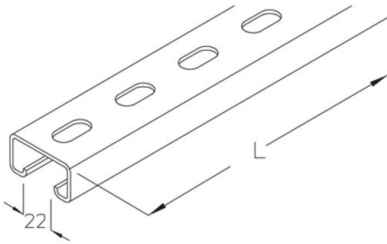


Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
KHA 4-30F	26 mm	48 mm	3000 mm	2,50 mm	6,8 kg
KHA 4-60F	26 mm	48 mm	6000 mm	2,50 mm	13,6 kg

**H:** height  
**B:** width  
**L:** length  
**t:** material thickness  
**G:** weight

## DETAILS / APPLICATIONS



$$W_y = 1.66 \text{ cm}^3$$

$$W_z = 3.83 \text{ cm}^3$$

$$I_y = 2.29 \text{ cm}^4$$

$$I_z = 9.18 \text{ cm}^4$$





## OPTIONAL ACCESSORIES

HS22, ASK 4

