


## KHA 7

profile rail 39.5x22 mm, perforated Maintenance of function - Standard support structures

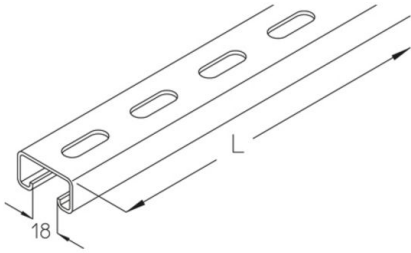

Profile rail 39.5x22x1.50 mm, with continuous perforation 11x30, slot size 18 mm

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish. The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)



Product	H	B	L	t	G
KHA 7-02S	22 mm	39,5 mm	200 mm	1,50 mm	0,21 kg
KHA 7-03S	22 mm	39,5 mm	300 mm	1,50 mm	0,31 kg
KHA 7-04S	22 mm	39,5 mm	400 mm	1,50 mm	0,41 kg
KHA 7-05S	22 mm	39,5 mm	500 mm	1,50 mm	0,51 kg
KHA 7-06S	22 mm	39,5 mm	600 mm	1,50 mm	0,61 kg
KHA 7-07S	22 mm	39,5 mm	700 mm	1,50 mm	0,78 kg
KHA 7-08S	22 mm	39,5 mm	800 mm	1,50 mm	0,83 kg
KHA 7-09S	22 mm	39,5 mm	900 mm	1,50 mm	1,00 kg
KHA 7-10S	22 mm	39,5 mm	1000 mm	1,50 mm	1,05 kg
KHA 7-11S	22 mm	39,5 mm	1100 mm	1,50 mm	1,15 kg
KHA 7-12S	22 mm	39,5 mm	1200 mm	1,50 mm	1,26 kg
KHA 7-13S	22 mm	39,5 mm	1300 mm	1,50 mm	1,36 kg
KHA 7-14S	22 mm	39,5 mm	1400 mm	1,50 mm	1,47 kg
KHA 7-15S	22 mm	39,5 mm	1500 mm	1,50 mm	1,57 kg
KHA 7-20S	22 mm	39,5 mm	2000 mm	1,50 mm	2,20 kg
KHA 7-30S	22 mm	39,5 mm	3000 mm	1,50 mm	3,20 kg
KHA 7-60S	22 mm	39,5 mm	6000 mm	1,50 mm	6,30 kg

**H:** height  
**B:** width  
**L:** length



t: material thickness  
G: weight

## DETAILS / APPLICATIONS

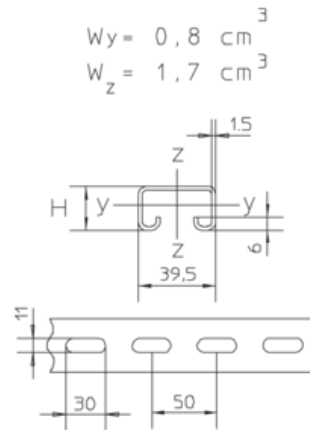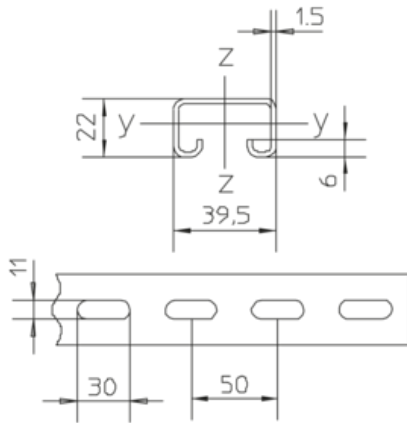

## OPTIONAL ACCESSORIES

AC, ASK 8

