


## KHA 9

profile rail 40x25 mm, perforated

profile rail 40x25x2.75 mm, with continuous perforation 11x24, slot size 18 mm

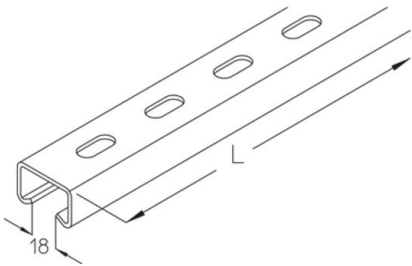

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Product   | H     | B       | L       | t       | G       |
|-----------|-------|---------|---------|---------|---------|
| KHA 9-02F | 25 mm | 39,5 mm | 200 mm  | 2,75 mm | 0,4 kg  |
| KHA 9-03F | 25 mm | 39,5 mm | 300 mm  | 2,75 mm | 0,6 kg  |
| KHA 9-04F | 25 mm | 39,5 mm | 400 mm  | 2,75 mm | 0,8 kg  |
| KHA 9-05F | 25 mm | 39,5 mm | 500 mm  | 2,75 mm | 0,9 kg  |
| KHA 9-06F | 25 mm | 39,5 mm | 600 mm  | 2,75 mm | 1,2 kg  |
| KHA 9-07F | 25 mm | 39,5 mm | 700 mm  | 2,75 mm | 1,4 kg  |
| KHA 9-08F | 25 mm | 39,5 mm | 800 mm  | 2,75 mm | 1,6 kg  |
| KHA 9-09F | 25 mm | 39,5 mm | 900 mm  | 2,75 mm | 1,8 kg  |
| KHA 9-10F | 25 mm | 39,5 mm | 1000 mm | 2,75 mm | 1,9 kg  |
| KHA 9-11F | 25 mm | 39,5 mm | 1100 mm | 2,75 mm | 2,1 kg  |
| KHA 9-12F | 25 mm | 39,5 mm | 1200 mm | 2,75 mm | 2,3 kg  |
| KHA 9-13F | 25 mm | 39,5 mm | 1300 mm | 2,75 mm | 2,4 kg  |
| KHA 9-14F | 25 mm | 39,5 mm | 1400 mm | 2,75 mm | 2,6 kg  |
| KHA 9-15F | 25 mm | 39,5 mm | 1500 mm | 2,75 mm | 2,8 kg  |
| KHA 9-20F | 25 mm | 39,5 mm | 2000 mm | 2,75 mm | 3,7 kg  |
| KHA 9-30F | 25 mm | 39,5 mm | 3000 mm | 2,75 mm | 5,6 kg  |
| KHA 9-60F | 25 mm | 39,5 mm | 6000 mm | 2,75 mm | 11,2 kg |

**H:** height



**B:** width

**L:** length



t: material thickness  
G: weight

## DETAILS / APPLICATIONS

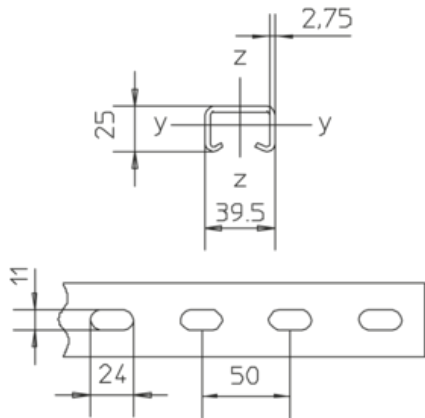

$$\begin{aligned}W_y &= 1.25 \text{ cm}^3 \\W_z &= 2.85 \text{ cm}^3 \\I_y &= 1.70 \text{ cm}^4 \\I_z &= 5.62 \text{ cm}^4\end{aligned}$$

## OPTIONAL ACCESSORIES

AMA18, HS18, ASK 8

