


KHB 7

profile rail 30x15 mm, perforated Maintenance of function - Standard support structures

profile rail 30x15x1.50 mm, with continuous perforation 9x35, slot size 16 mm

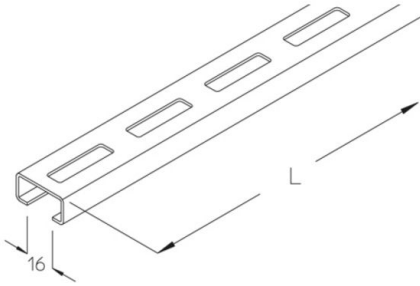

For fastening cable clamps. This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish. The products can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	L	t	G
KHB 7-30S	15 mm	30 mm	3000 mm	1,50 mm	2,1 kg
KHB 7-60S	15 mm	30 mm	6000 mm	1,50 mm	4,2 kg


Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
KHB 7-30F	15 mm	30 mm	3000 mm	1,50 mm	2,3 kg
KHB 7-60F	15 mm	30 mm	6000 mm	1,50 mm	4,6 kg

H: height
B: width
L: length
t: material thickness
G: weight

DETAILS / APPLICATIONS



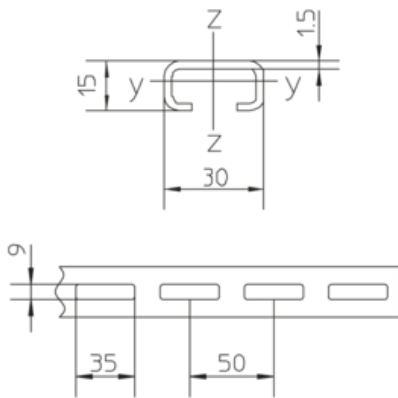

OPTIONAL ACCESSORIES

H

