

KHU 80

bracket support, heavy, 80x60 mm

Bracket support, U-profile 80x60x5 mm, continuously three-way perforated.

Higher loads can be achieved by using the support piece.

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	G
KHU 80-02F	80 mm	60 mm	200 mm	1,33 kg
KHU 80-03F	80 mm	60 mm	300 mm	2,00 kg
KHU 80-04F	80 mm	60 mm	400 mm	2,66 kg
KHU 80-05F	80 mm	60 mm	500 mm	3,33 kg
KHU 80-06F	80 mm	60 mm	600 mm	3,99 kg
KHU 80-07F	80 mm	60 mm	700 mm	4,66 kg
KHU 80-08F	80 mm	60 mm	800 mm	5,32 kg
KHU 80-09F	80 mm	60 mm	900 mm	5,99 kg
KHU 80-10F	80 mm	60 mm	1000 mm	6,65 kg
KHU 80-11F	80 mm	60 mm	1100 mm	7,32 kg
KHU 80-12F	80 mm	60 mm	1200 mm	7,98 kg
KHU 80-13F	80 mm	60 mm	1300 mm	8,65 kg
KHU 80-14F	80 mm	60 mm	1400 mm	9,32 kg
KHU 80-15F	80 mm	60 mm	1500 mm	9,98 kg
KHU 80-20F	80 mm	60 mm	2000 mm	13,31 kg
KHU 80-30F	80 mm	60 mm	3000 mm	19,96 kg
KHU 80-60F	80 mm	60 mm	6000 mm	39,92 kg

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)






Product	H	B	L	G
KHU 80-02-HDG	80 mm	60 mm	200 mm	1,33 kg
KHU 80-03-HDG	80 mm	60 mm	300 mm	2,00 kg
KHU 80-04-HDG	80 mm	60 mm	400 mm	2,66 kg
KHU 80-05-HDG	80 mm	60 mm	500 mm	3,33 kg
KHU 80-06-HDG	80 mm	60 mm	600 mm	3,99 kg
KHU 80-07-HDG	80 mm	60 mm	700 mm	4,66 kg
KHU 80-08-HDG	80 mm	60 mm	800 mm	5,32 kg
KHU 80-09-HDG	80 mm	60 mm	900 mm	5,99 kg
KHU 80-10-HDG	80 mm	60 mm	1000 mm	6,65 kg
KHU 80-11-HDG	80 mm	60 mm	1100 mm	7,32 kg
KHU 80-12-HDG	80 mm	60 mm	1200 mm	7,98 kg
KHU 80-13-HDG	80 mm	60 mm	1300 mm	8,65 kg
KHU 80-14-HDG	80 mm	60 mm	1400 mm	9,32 kg
KHU 80-15-HDG	80 mm	60 mm	1500 mm	9,98 kg
KHU 80-20-HDG	80 mm	60 mm	2000 mm	13,31 kg
KHU 80-30-HDG	80 mm	60 mm	3000 mm	19,96 kg
KHU 80-60-HDG	80 mm	60 mm	6000 mm	39,92 kg

H: height
B: width
L: length
G: weight

DETAILS / APPLICATIONS



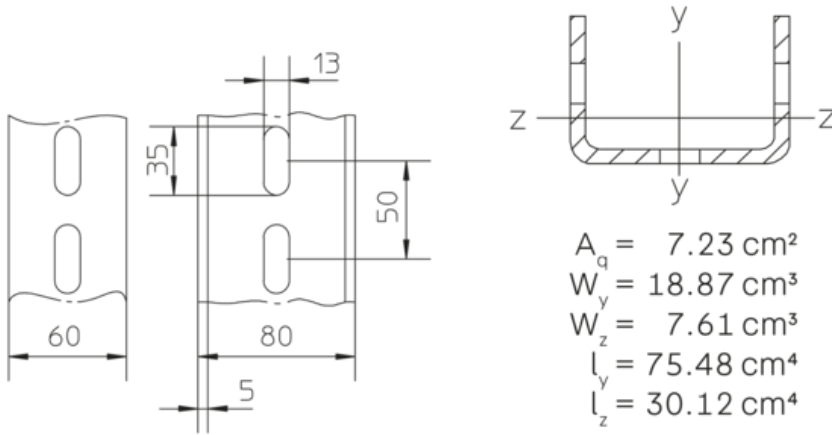

OPTIONAL ACCESSORIES

BGU 80, KHUV 80, KHUSS 80, KW, KLS, SU 80

