


## KHUSS 60

support piece, KHU 60 Maintenance of function - Standard support structures

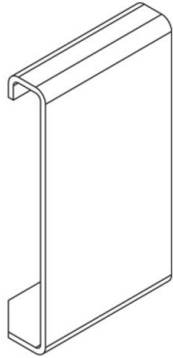

The products can be used in conjunction with wall brackets. For technical parameters, see National Technical Test Certificates (abPs).

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	G
KHUSS 60S	0,18 kg
incl.:	
1x SES 10X100	hexagon head bolt, DIN 933
1x SEM 10	hexagon-nut, DIN 934
2x US 10X21	washer, DIN EN ISO 7089

### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	G
KHUSS 60F	0,19 kg
incl.:	
1x SES 10X100F	hexagon head bolt, DIN 933
1x SEM 10F	hexagon-nut, DIN 934
2x US 10X21F	washer, DIN EN ISO 7089

**G:** weight

