


KHUSS 60

support piece, KHU 60

The support piece is to be used in conjunction with KDU/KHU 60.

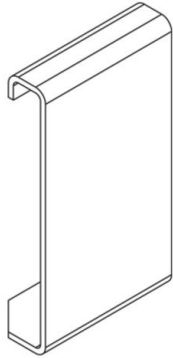

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	G
KHUSS 60S	0,18 kg
incl.:	
1x SES 10X100	hexagon head bolt, DIN 933
1x SEM 10	hexagon-nut, DIN 934
2x US 10X21	washer, DIN EN ISO 7089

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	G
KHUSS 60F	0,19 kg
incl.:	
1x SES 10X100F	hexagon head bolt, DIN 933
1x SEM 10F	hexagon-nut, DIN 934
2x US 10X21F	washer, DIN EN ISO 7089

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	G
KHUSS 60E	0,19 kg





Product	G
---------	---

incl.:

1x SES 10X100E
1x SEM 10E
2x US 10X21E

hexagon head bolt, DIN 933
hexagon-nut, DIN 934
washer, DIN EN ISO 7089

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	G
---------	---

KHUSS 60E4	0,19 kg
------------	---------

incl.:

1x SES 10X100E4
1x SEM 10E4
2x US 10X21E4

hexagon head bolt, DIN 933
hexagon-nut, DIN 934
washer, DIN EN ISO 7089

G: weight

