


KHUV 57

connector, KHU 57

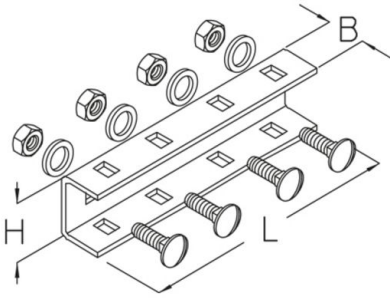

galvanized, according to DIN EN ISO 19598 / DIN EN ISO 2081

| Product | H | B | L | t | G |
|---------------|---|---------|--------|---------|---------|
| KHUV 57GV | 63 mm | 32,5 mm | 210 mm | 2,50 mm | 0,59 kg |
| incl.: | | | | | |
| 4x FRSV 10X20 | round-head screw with short square, DIN 603 | | | | |
| 4x SEMS 10 | hexagon-nut with flange, DIN EN 1661 | | | | |

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Product | H | B | L | t | G |
|---------------|---|---------|--------|---------|---------|
| KHUV 57S | 63 mm | 32,5 mm | 210 mm | 2,50 mm | 0,60 kg |
| incl.: | | | | | |
| 4x FRSV 10X20 | round-head screw with short square, DIN 603 | | | | |
| 4x SEM 10 | hexagon-nut, DIN 934 | | | | |

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Product | H | B | L | t | G |
|----------------|---|---------|--------|---------|---------|
| KHUV 57F | 63 mm | 32,5 mm | 210 mm | 2,50 mm | 0,63 kg |
| incl.: | | | | | |
| 4x FRSV 10X20F | round-head screw with short square, DIN 603 | | | | |
| 4x SEM 10F | hexagon-nut, DIN 934 | | | | |



Stainless steel, according to ASTM 304 / BS 304 S 3

| Product | H | B | L | t | G |
|----------------|---|---------|--------|---------|---------|
| KHUV 57E | 63 mm | 32,5 mm | 210 mm | 2,50 mm | 0,60 kg |
| incl.: | | | | | |
| 4x FRSV 10X20E | round-head screw with short square, DIN 603 | | | | |
| 4x SEM 10E | hexagon-nut, DIN 934 | | | | |

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

| Product | H | B | L | t | G |
|-----------------|---|---------|--------|---------|---------|
| KHUV 57E4 | 63 mm | 32,5 mm | 210 mm | 2,50 mm | 0,61 kg |
| incl.: | | | | | |
| 4x FRSV 10X20E4 | round-head screw with short square, DIN 603 | | | | |
| 4x SEM 10E4 | hexagon-nut, DIN 934 | | | | |

H: height
B: width
L: length
t: material thickness
G: weight

DETAILS / APPLICATIONS

