


KHUV 60

connector, KHU 60

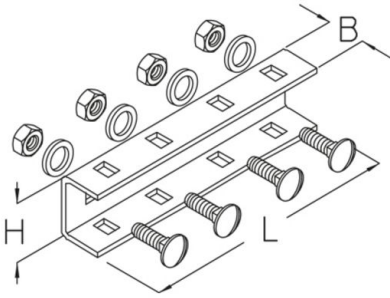

galvanized, according to DIN EN ISO 19598 / DIN EN ISO 2081

Product	H	B	L	G
KHUV 60GV	51 mm	35 mm	210 mm	0,74 kg
incl.:				
4x FRSV 10X20	round-head screw with short square, DIN 603			
4x SEMS 10	hexagon-nut with flange, DIN EN 1661			

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	G
KHUV 60F	51 mm	35 mm	210 mm	0,80 kg
incl.:				
4x FRSV 10X20F	round-head screw with short square, DIN 603			
4x SEM 10F	hexagon-nut, DIN 934			

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	L	G
KHUV 60E	51 mm	35 mm	210 mm	0,89 kg
incl.:				
4x FRSV 10X20E	round-head screw with short square, DIN 603			
4x SEM 10E	hexagon-nut, DIN 934			





Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	H	B	L	G
KHUV 60E4	51 mm	35 mm	210 mm	0,89 kg
incl.:				
4x FRSV 10X20E4	round-head screw with short square, DIN 603			
4x SEM 10E4	hexagon-nut, DIN 934			

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	G
KHUV 60-HDG	51 mm	35 mm	210 mm	0,80 kg
incl.:				
4x KLS 10X20-HDG	clamp fastening set			

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	L	G
KHUV 60-304	51 mm	35 mm	210 mm	0,80 kg
incl.:				
4x KLS 10X20-304	clamp fastening set			

H: height
B: width
L: length
G: weight

DETAILS / APPLICATIONS



