


KHUV 80

connector, KHU 80

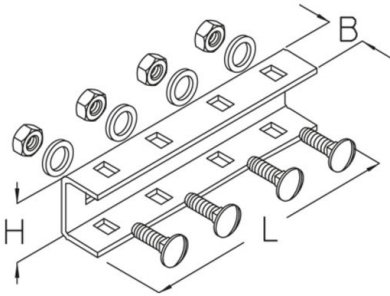

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
KHUV 80F	69 mm	54 mm	310 mm	4,00 mm	1,92 kg
incl.:					
6x SEM 12F	hexagon-nut, DIN 934				
6x FRS 12X30F	round-head screw with square, DIN 603				

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
KHUV 80-HDG	69 mm	54 mm	310 mm	4,00 mm	1,92 kg
incl.:					
6x FRS 12X30-HDG	round-head screw with square, DIN 603				
6x SEM 12-HDG	hexagon-nut, DIN 934				

H: height
B: width
L: length
t: material thickness
G: weight

