


LD-SW

storm protection angle

protection angle for additional securing of cable ladder covers especially in outdoor use

Storm protection angles, suitable for outdoor use. According to assembly instructions you should use at least 6 safety elements for each 3 meters cable path cover.

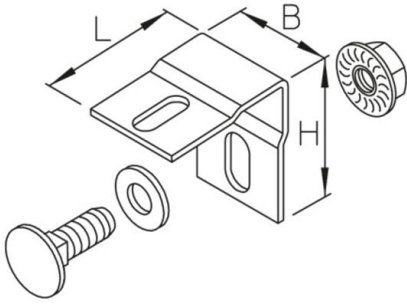

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
LD-SW F	43 mm	30 mm	45 mm	2,00 mm	0,06 kg
incl.:					
1x KLS 8X16E				clamp fastening set	
1x UVS M8				captive washer	

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	L	t	G
LD-SW E	43 mm	30 mm	45 mm	2,00 mm	0,06 kg
incl.:					
1x KLS 8X16E				clamp fastening set	
1x UVS M8				captive washer	

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	H	B	L	t	G
LD-SW E4	43 mm	30 mm	45 mm	2,00 mm	0,06 kg
incl.:					
1x FRS 8X25E4				round-head screw with square, DIN 603	
1x SEM 8E4				hexagon-nut, DIN 934	
1x UVS M8				captive washer	



H: height
B: width
L: length
t: material thickness
G: weight

DETAILS / APPLICATIONS

