


LGAB 100

cable ladder outside bend, height = 100 mm

cable ladder outside bend 90° for horizontal change of direction

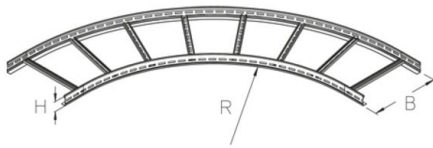

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Product | H | B | R | G |
|--------------|--------|--------|---------|----------|
| LGAB 100-20F | 100 mm | 200 mm | 700 mm | 5,71 kg |
| LGAB 100-30F | 100 mm | 300 mm | 800 mm | 6,9 kg |
| LGAB 100-40F | 100 mm | 400 mm | 900 mm | 8,68 kg |
| LGAB 100-50F | 100 mm | 500 mm | 1000 mm | 10,03 kg |
| LGAB 100-60F | 100 mm | 600 mm | 1100 mm | 11,37 kg |


Stainless steel, according to ASTM 304 / BS 304 S 3

| Product | H | B | R | G |
|--------------|--------|--------|---------|----------|
| LGAB 100-20E | 100 mm | 200 mm | 700 mm | 5,37 kg |
| LGAB 100-30E | 100 mm | 300 mm | 800 mm | 6,49 kg |
| LGAB 100-40E | 100 mm | 400 mm | 900 mm | 8,17 kg |
| LGAB 100-50E | 100 mm | 500 mm | 1000 mm | 9,43 kg |
| LGAB 100-60E | 100 mm | 600 mm | 1100 mm | 10,69 kg |

H: height
B: width
R: radius
G: weight



DETAILS / APPLICATIONS

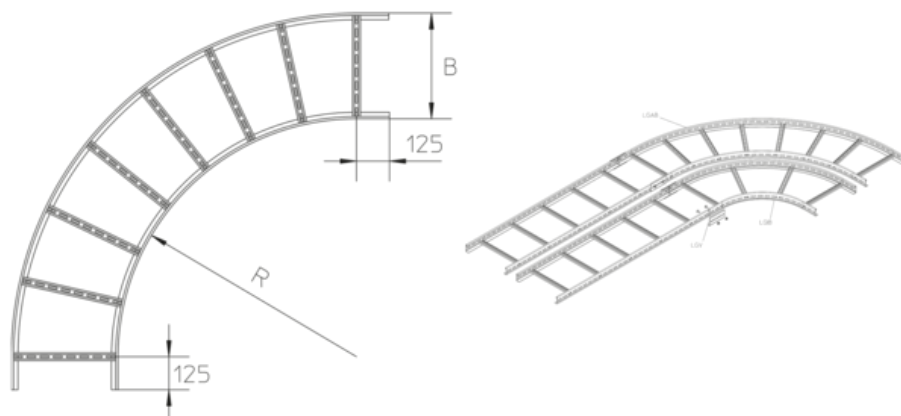

OPTIONAL ACCESSORIES

LGV 100, LGVH 100, LGVV 100, KLU, LGTRV 100



UL classified

