


## LGIB-BS 60

cable ladder inside bend, height = 60 mm Maintenance of function - Standard support structures

cable ladder bend 90°, for horizontal change of direction

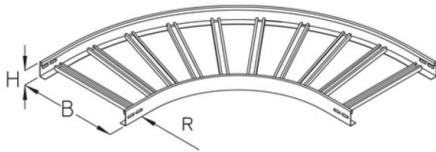


The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	R	G
LGIB-BS 60-20F	60 mm	200 mm	400 mm	3,5 kg
LGIB-BS 60-30F	60 mm	300 mm	400 mm	4,5 kg
LGIB-BS 60-40F	60 mm	400 mm	400 mm	5,4 kg

**H:** height  
**B:** width  
**R:** radius  
**G:** weight

## DETAILS / APPLICATIONS

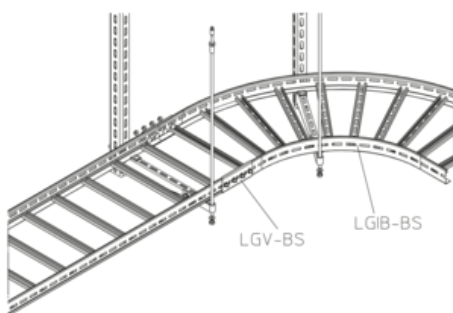



## OPTIONAL ACCESSORIES

LGV-BS 60, LGVH-BS 60, LGVV-BS 60, KLU, LGTRV 60

