


## RB-BS 60

cable tray bend, height = 60 mm Maintenance of function - Standard support structures

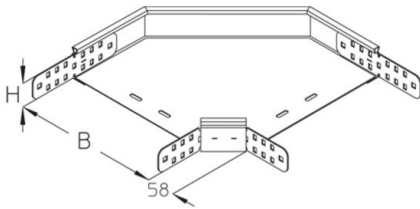

cable tray bend, 90°, for horizontal change of direction with integrated connectors

The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	G
RB-BS 60-10S	60 mm	100 mm	0,80 kg
incl.: 4x KLR	clamp fastening set		
RB-BS 60-20S	60 mm	200 mm	1,27 kg
incl.: 4x KLR	clamp fastening set		
RB-BS 60-30S	60 mm	300 mm	1,92 kg
incl.: 4x KLR	clamp fastening set		

### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)


Product	H	B	G
RB-BS 60-10F	60 mm	100 mm	0,92 kg
incl.: 4x KLR E	clamp fastening set		
RB-BS 60-20F	60 mm	200 mm	1,38 kg
incl.: 4x KLR E	clamp fastening set		
RB-BS 60-30F	60 mm	300 mm	2,14 kg



Product	H	B	G
incl.: 4x KLR E			
	clamp fastening set		

**H:** height  
**B:** width  
**G:** weight

## DETAILS / APPLICATIONS

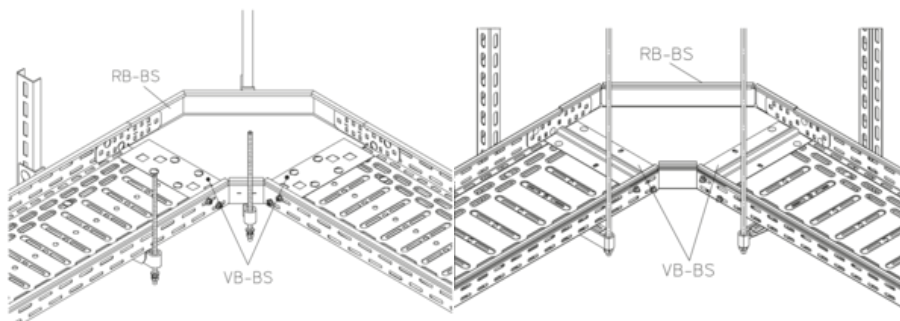

## OPTIONAL ACCESSORIES

VB-BS

