


RB-BS 60

cable tray bend, height = 60 mm Maintenance of function, specified system

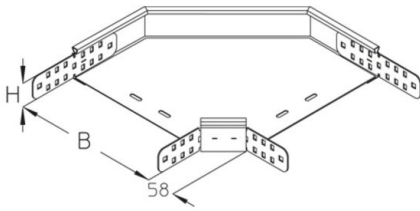

cable tray bend, 90°, for horizontal change of direction with integrated connectors

The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Product | H | B | G |
|------------------|---------------------|--------|---------|
| RB-BS 60-10S | 60 mm | 100 mm | 0,80 kg |
| RB-BS 60-20S | 60 mm | 200 mm | 1,27 kg |
| RB-BS 60-30S | 60 mm | 300 mm | 1,92 kg |
| RB-BS 60-40S | 60 mm | 400 mm | 2,75 kg |
| incl.: 4x KLR | clamp fastening set | | |

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Product | H | B | G |
|--------------------|---------------------|--------|---------|
| RB-BS 60-10F | 60 mm | 100 mm | 0,92 kg |
| RB-BS 60-20F | 60 mm | 200 mm | 1,38 kg |
| RB-BS 60-30F | 60 mm | 300 mm | 2,14 kg |
| RB-BS 60-40F | 60 mm | 400 mm | 2,46 kg |
| incl.: 4x KLR E | clamp fastening set | | |

H: height
B: width
G: weight





OPTIONAL ACCESSORIES

VB-BS

