


## RBV 85

cable tray bend, variable, height = 85 mm

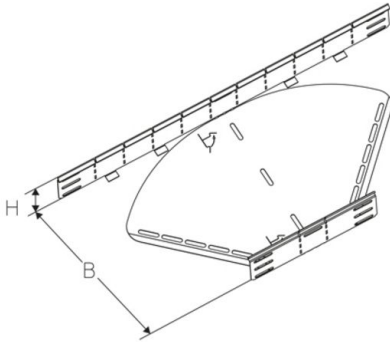

Variable cable tray bend 0 - 90° for horizontal change of direction with integrated connectors. With elongated holes for fastening separating strips or brackets. To obtain more stability at larger angles, the outer side can be connected to the bottom from a width of 200 mm. For cable protection, the edges at the head of the variable cable tray bend are folded over.

The variable cable tray bend is in a flat condition on delivery. For assembly, the inner and outer sides must be bent up. Attention must be paid to the correct alignment of the head shape.

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	L	G
RBV 85-10S	85 mm	100 mm	310 mm	0,44 kg
incl.: 6x KLR clamp fastening set				
RBV 85-20S	85 mm	200 mm	490 mm	0,74 kg
incl.: 6x KLR clamp fastening set				
RBV 85-30S	85 mm	300 mm	630 mm	1,46 kg
incl.: 7x KLR clamp fastening set				
RBV 85-40S	85 mm	400 mm	790 mm	2,09 kg
incl.: 7x KLR clamp fastening set				
RBV 85-50S	85 mm	500 mm	940 mm	3,53 kg
incl.: 8x KLR clamp fastening set				
RBV 85-60S	85 mm	600 mm	1190 mm	4,69 kg
incl.: 8x KLR clamp fastening set				

**H:** height  
**B:** width





**L:** length  
**G:** weight

## OPTIONAL ACCESSORIES

RBVD, RBVDR, RTRV 85

