


## RTRV 85

Rinntrennsteg, variabel, Höhe = 80 mm

EN Rinntrennsteg, variabel inkl. Befestigungsschrauben

Kabelkanaltrennung durch Formteile hindurch

Frei biegsam durch Segmente

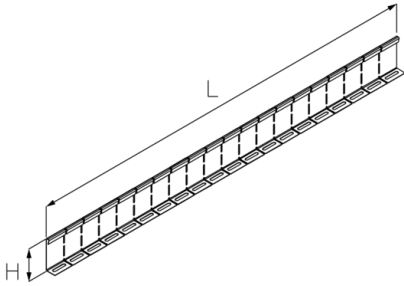

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	L	G
RTRV 85S	80 mm	25 mm	1000 mm	0,671 kg
incl.:				
3x FRSV 6X12	round-head screw with short square, DIN 603			
3x SEMS 6	hexagon-nut with flange, DIN EN 1661			

### Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	L	G
RTRV 85E	80 mm	25 mm	1000 mm	0,722 kg
incl.:				
3x FRSV 6X12E	round-head screw with short square, DIN 603			
3x SEMS 6E	hexagon-nut with flange, DIN EN 1661			


### Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	H	B	L	G
RTRV 85E4	80 mm	25 mm	1000 mm	0,731 kg
incl.:				
3x FRSV 6X12E4	round-head screw with short square, DIN 603			
3x SEM 6E4	hexagon-nut, DIN 934			
3x US 6X12E4	washer, DIN EN ISO 7089			



**H:** height  
**B:** width  
**L:** length  
**G:** weight

## DETAILS / APPLICATIONS

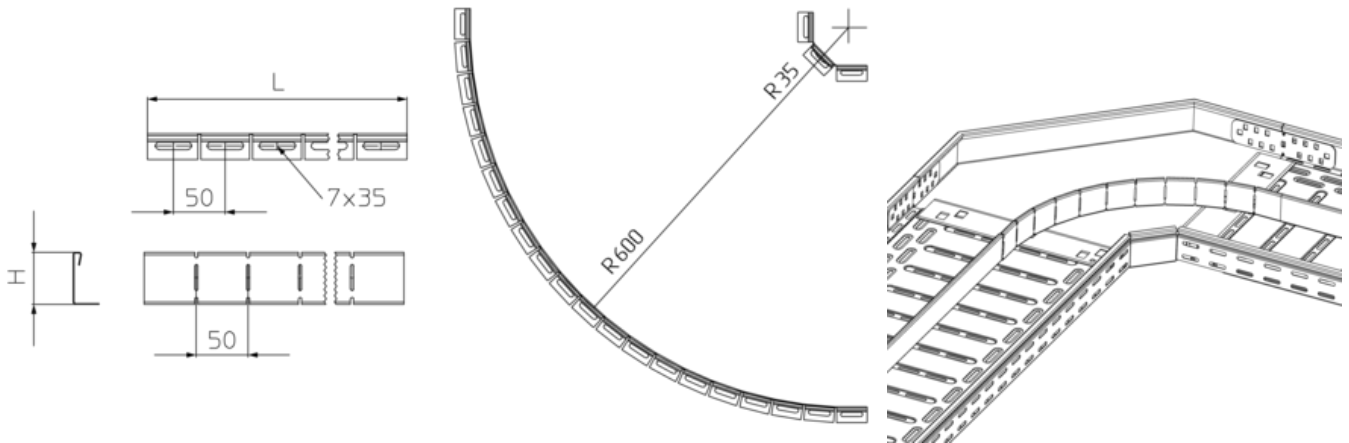

## OPTIONAL ACCESSORIES

KLF

