


## SEMSS

hexagon-nut, self-locking, DIN 985

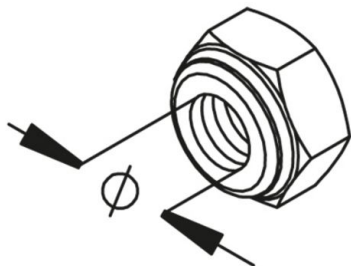

**galvanized, according to DIN EN ISO 19598 / DIN EN ISO 2081**

Product	Ø	t	SW	G
SEMSS 5	5 mm	5,00 mm	8 mm	0,2 kg/100

**Stainless steel, according to ASTM 304 / BS 304 S 3**

Product	Ø	t	SW	G
SEMSS 6E	8 mm	8,00 mm	13 mm	0,20 kg/100
SEMSS 8E	8 mm	8,00 mm	13 mm	0,45 kg/100

**Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11**

Product	Ø	t	SW	G
SEMSS 6E4	6 mm	6,00 mm	10 mm	0,2 kg/100
SEMSS 8E4	8 mm	8,00 mm	13 mm	0,45 kg/100

**Stainless steel, according to ASTM 304 / BS 304 S 3**

Product	Ø	t	SW	G
SEMSS 10-304	10 mm	10,00 mm	17(15) mm	1,00 kg/100



Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	Ø	t	SW	G
SEMSS 10-316	10 mm	10,00 mm	17 mm	1,1 kg/100

Ø: diameter  
t: material thickness  
SW: wrench size  
G: weight

## DETAILS / APPLICATIONS

