


SKL A

beam clamp set



Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	k	P_{max}	M	G
SKL A-HDG	5 - 25 mm	10 kN	35 Nm	0,49 kg/set
incl.:				
2x SES 10X55-HDG		hexagon head bolt, DIN 933		
2x AM22 M10-HDG		channel nut, A 41, KHA 41, KHAL 41		
2x UVS M10X24-PE		captive washer		


Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	k	P_{max}	M	G
SKL A-316	5 - 25 mm	10 kN	35 Nm	0,49 kg/set
incl.:				
2x SES 10X55-316		hexagon head bolt, DIN 933		
2x AM22 M10-316		channel nut, A 41, KHA 41, KHAL 41		
2x UVS M10X24-PE		captive washer		

k: clamping range
 P_{max} : Maximum load
M: torque
G: weight



DETAILS / APPLICATIONS

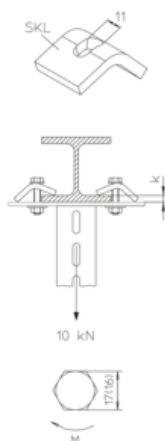

OPTIONAL ACCESSORIES

A 41, KHA 41, KHAL 41

