


SLV
ship ladder connector

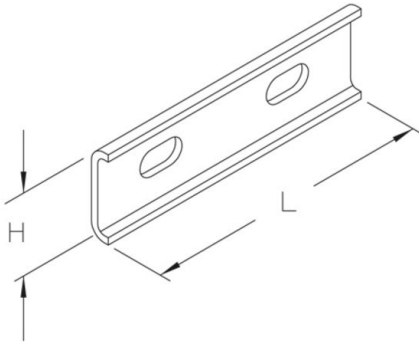

Bright rolled

Product	H	L	G
SLV B	38 mm	120 mm	0,1 kg
incl.:			
2x KLS 10X20F		clamp fastening set	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	L	G
SLV F	38 mm	120 mm	0,1 kg
incl.:			
2x KLS 10X20F		clamp fastening set	

weld-primed

Product	H	L	G
SLV M	38 mm	120 mm	0,1 kg
incl.:			
2x KLS 10X20F		clamp fastening set	



Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	L	G
SLV-HDG	38 mm	120 mm	0,17 kg
incl.:			
2x KLS 10X20-HDG		clamp fastening set	

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	H	L	G
SLV-316	38 mm	120 mm	0,1 kg
incl.:			
2x KLS 10X20-316		clamp fastening set	

H: height
L: length
G: weight

DETAILS / APPLICATIONS

