


## UBDHB250 2R

hollow space floor box, double, round

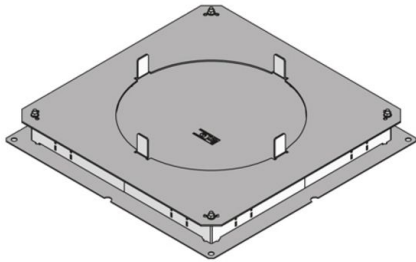

Hollow space floor box, consists of a Sendzimir hot-dip galvanized steel sheet box with four bendable side walls and grounding clamp for subsonic-noise free and height-undependable assembly, can be used as pull- and installation box, openings for insertion of a shuttering unit that will be replaced with a round plastic installation unit during final assembly.

material	sheet steel, hot-dip galvanized
type of assembly	Mounting on raw concrete ceiling
application area	screed-covered duct system, for ducts up to 250 mm width
permits	according to VDE / TÜV
norm	according to DIN EN 50085


### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	H <sub>min</sub>	B1	B2	L1	L2	E	mounting box	G
UBDHB250 28-259R	31 mm	67 mm	385 mm	400 mm	385 mm	400 mm	260 mm	double	3,1 kg
incl.:			grounding clamp						
1x UBDHB-Z									
UBDHB250 38-259R	41 mm	77 mm	385 mm	400 mm	385 mm	400 mm	260 mm	double	3,2 kg
incl.:			grounding clamp						
1x UBDHB-Z									
UBDHB250 48-259R	51 mm	87 mm	385 mm	400 mm	385 mm	400 mm	260 mm	double	3,3 kg
incl.:			grounding clamp						
1x UBDHB-Z									



**H:** height  
**H<sub>min</sub>:** Minimum installation height  
**B1:** width  
**B2:** width  
**L1:** length 1  
**L2:** length 2  
**E:** fitting dimension  
**mounting box:** Maximum number of installable device casings.  
**G:** weight

## DETAILS / APPLICATIONS

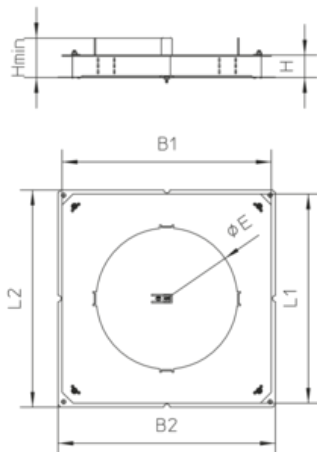

## OPTIONAL ACCESSORIES

USR, UN

