


UBDHB250 3V

hollow space floor box, triple, angular

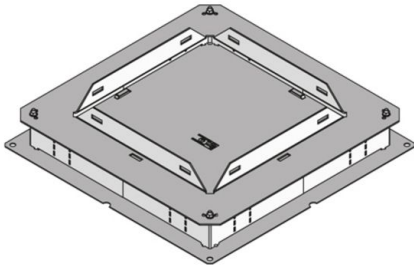

hollow space floor box consisting of a Sendzimir hot-dip galvanized sheet steel box with all-round bendable side walls including grounding clamp for a subsonic noise free and height independent assembly. Usable as pull- and installation box, with one opening for insertion of a shuttering unit that will be replaced with a quadrangular plastic or high-grade steel assembly unit during final assembly.

material	sheet steel, hot-dip galvanized
type of assembly	Mounting on raw concrete ceiling
application area	screed-covered duct system, for ducts up to 250 mm width
permits	according to VDE / TÜV
norm	according to DIN EN 50085

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	H _{min}	B1	B2	L1	L2	E	mounting box	G
UBDHB250 28-259V	31 mm	67 mm	385 mm	400 mm	385 mm	400 mm	262 x 262 mm	triple	3,3 kg
incl.:									
1x UBDHB-Z		grounding clamp							
UBDHB250 38-259V	41 mm	77 mm	385 mm	400 mm	385 mm	400 mm	262 x 262 mm	triple	3,4 kg
incl.:									
1x UBDHB-Z		grounding clamp							
UBDHB250 48-259V	51 mm	87 mm	385 mm	400 mm	385 mm	400 mm	262 x 262 mm	triple	3,5 kg
incl.:									
1x UBDHB-Z		grounding clamp							



H: height

H_{min}: Minimum installation height

B1: width

B2: width

L1: length 1


L2: length 2

E: fitting dimension

mounting box: Maximum number of installable device casings.

G: weight

DETAILS / APPLICATIONS

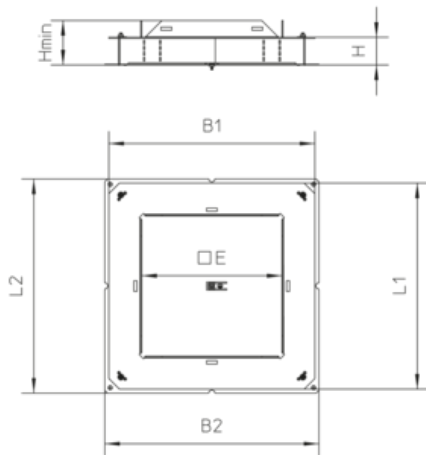

OPTIONAL ACCESSORIES

USK, UN

