


## UBDHB350 2R

hollow space floor box, double, round

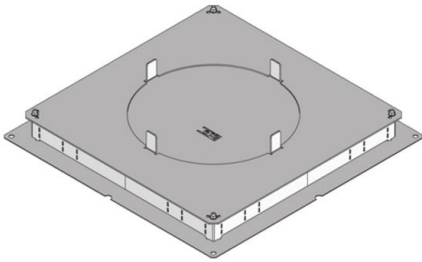

hollow space floor box consisting of a Sendzimir hot-dip galvanized sheet steel box with all-round bendable side walls including grounding clamp for a subsonic noise free and height independent assembly. Usable as pull- and installation box, with one opening for insertion of a shuttering tube that will be replaced with a round plastic or high-grade steel assembly unit during final assembly.

material	sheet steel, hot-dip galvanized
type of assembly	Mounting on raw concrete ceiling
application area	screed-covered duct system, for ducts up to 350 mm width
permits	according to VDE / TÜV
norm	according to DIN EN 50085


### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	H <sub>min</sub>	B1	B2	L1	L2	E	mounting box	G
UBDHB350 28-259R	31 mm	63 mm	410 mm	450 mm	410 mm	450 mm	260 mm	double	3,8 kg
incl.:			1x UBDHB-Z grounding clamp						
UBDHB350 38-259R	41 mm	73 mm	410 mm	450 mm	410 mm	450 mm	260 mm	double	3,9 kg
incl.:			1x UBDHB-Z grounding clamp						
UBDHB350 48-259R	51 mm	83 mm	410 mm	450 mm	410 mm	450 mm	260 mm	double	4,0 kg
incl.:			1x UBDHB-Z grounding clamp						



**H:** height  
**H<sub>min</sub>:** Minimum installation height  
**B1:** width  
**B2:** width  
**L1:** length 1  
**L2:** length 2  
**E:** fitting dimension  
**mounting box:** Maximum number of installable device casings.  
**G:** weight

## DETAILS / APPLICATIONS

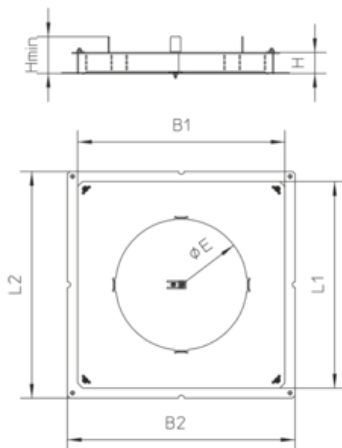

## OPTIONAL ACCESSORIES

USR, UN

