


UBDHB350 3V

hollow space floor box, triple, angular

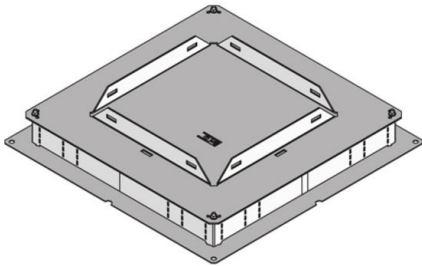

hollow space floor box consisting of a Sendzimir hot-dip galvanized sheet steel box with all-round bendable side walls including grounding clamp for a subsonic noise free and height independent assembly. Usable as pull- and installation box, with one opening for insertion of a shuttering unit that will be replaced with a quadrangular plastic or high-grade steel assembly unit during final assembly.

material	sheet steel, hot-dip galvanized
type of assembly	Mounting on raw concrete ceiling
application area	screed-covered duct system, for ducts up to 350 mm width
permits	according to VDE / TÜV
norm	according to DIN EN 50085


Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	H _{min}	B1	B2	L1	L2	E	mounting box	G
UBDHB350 28-259V	31 mm	67 mm	410 mm	450 mm	410 mm	450 mm	262 x 262 mm	triple	3,9 kg
incl.:									
1x UBDHB-Z		grounding clamp							
UBDHB350 38-259V	41 mm	77 mm	410 mm	450 mm	410 mm	450 mm	262 x 262 mm	triple	4,0 kg
incl.:									
1x UBDHB-Z		grounding clamp							
UBDHB350 48-259V	51 mm	87 mm	410 mm	450 mm	410 mm	450 mm	262 x 262 mm	triple	4,1 kg
incl.:									
1x UBDHB-Z		grounding clamp							



H: height
H_{min}: Minimum installation height
B1: width
B2: width
L1: length 1
L2: length 2
E: fitting dimension
mounting box: Maximum number of installable device casings.
G: weight

DETAILS / APPLICATIONS

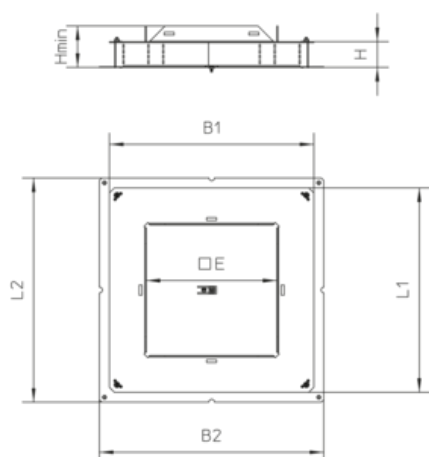

OPTIONAL ACCESSORIES

USK, UN

