


## UBKAB

outward profile bend

Hot-dip galvanized outward profile bend as accessory for screed-flush heavy-duty ducts, for construction of formed components.

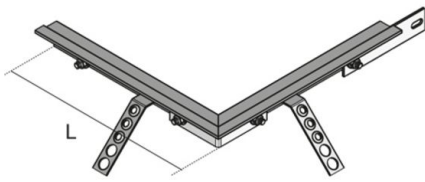

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	L	G
UBKAB5F	340 mm	2,5 kg
incl.:		
1x UBKPRV	connector	
1x UBKPRVE	connector	
4x SEMS 8	hexagon-nut with flange, DIN EN 1661	
4x FRS 8X25	round-head screw with square, DIN 603	
UBKAB8F	350 mm	3,1 kg
incl.:		
1x UBKPRV	connector	
1x UBKPRVE	connector	
4x SEMS 8	hexagon-nut with flange, DIN EN 1661	
4x FRS 8X25	round-head screw with square, DIN 603	
UBKAB10F	350 mm	4,2 kg
incl.:		
1x UBKPRV	connector	
1x UBKPRVE	connector	
4x SEMS 8	hexagon-nut with flange, DIN EN 1661	
4x FRS 8X25	round-head screw with square, DIN 603	

**L:** length  
**G:** weight

## OPTIONAL ACCESSORIES

UBKV



