


## UEB3 V

dummy cover unit made of polyamide, triple, angular



Quadrangular installation unit made of polyamide with a carpet protection frame. As an assembly frame with sheet steel inlay, including a universal set of fastening claws. For the installation into floor boxes, assembly covers and into raised or hollow floor openings. Suitable for rooms with dry-cleaned floor coverings up to 10 mm. Designed for office traffic loads.

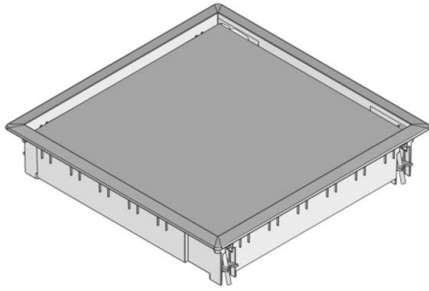

material	Cover and frame: PA6, surface matt finished, steel sheet inlay: 3 mm hot-dip galvanized steel plate
type of assembly	Assembly in floor box UBDHB, double or hollow floor openings
application area	dry floor cleaning
protection class	in use IP 20 / not in use IP 30
norm	according to DIN EN 50085
permits	according to VDE / TÜV
loading	including inspection stamp $\varnothing$ 13 / 130 mm: 2 / 3 kN

### Polyamide


Product	H	H <sub>min</sub>	B	L	E	T	P <sub>max</sub>	color	IP <sub>n</sub>	G
UEB3-V-G	58 mm	63 mm	280 mm	280 mm	260x260 mm	10 mm	2 kN	RAL 7011 (iron grey)	IP 30	1,27 kg
incl.:										
4x UDKS3-VR		universal claw for plastic units								
UEB3-V-S	58 mm	63 mm	280 mm	280 mm	260x260 mm	10 mm	2 kN	RAL 9011 (graphite black)	IP 30	1,27 kg
incl.:										
4x UDKS3-VR		universal claw for plastic units								

**H:** height  
**H<sub>min</sub>:** Minimum installation height  
**B:** width



**L:** length  
**E:** fitting dimension  
**T:** depth  
**P<sub>max</sub>:** Maximum load  
**color:**  
**IP<sub>n</sub>:** IP protection level in unused condition  
**G:** weight

## DETAILS / APPLICATIONS

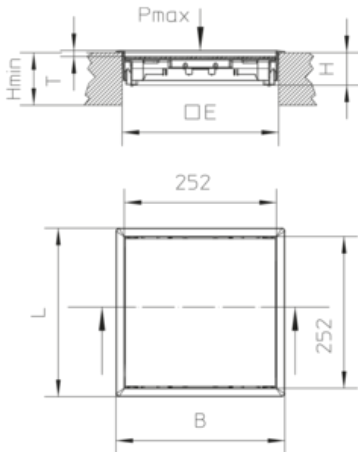

## OPTIONAL ACCESSORIES

UDKS3, UEB V, UDKS 40-80, UDKSEB



dry-cleaned

