


## UEBD V E

stainless steel dummy cover unit, triple, angular

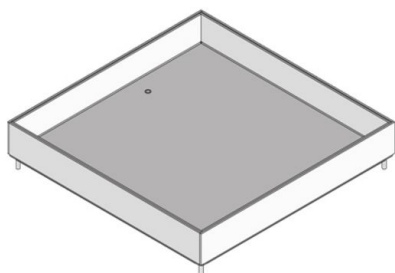

Quadrangular cartridge made of stainless steel panel with a hem. As a cartridge installation frame with dummy assembly cartridge, rubber seal and mounting bolts for the assembly on levelling units, in floor boxes, assembly covers and double- or hollow floor openings. Suitable for rooms with dry or wet-cleaned floors.

Please mind the technical information in chapter planning.



material	cartridge and frame: 2 mm high-grade steel V2A
type of assembly	Assembly on levelling unit UNE
application area	wet floor cleaning
protection class	not in use IP 54
norm	according to DIN EN 50085
permits	according to VDE / TÜV
loading	including inspection stamp Ø 13 / 130 mm: 2 / 3 kN

### Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	H <sub>min</sub>	B	L	E	T	P <sub>max</sub>	IP <sub>n</sub>	G
UEBD 15-V E	19 mm	85 mm	258 mm	258 mm	261 x 261 mm	12 mm	2 kN	IP 54	1,75 kg
incl.:									
1x UGD3-V 2					rubber seal, square				
4x UKS M4X16E					Phillips screw				
UEBD 25-V E	29 mm	95 mm	258 mm	258 mm	261 x 261 mm	22 mm	2 kN	IP 54	1,98 kg
incl.:									
1x UGD3-V 2					rubber seal, square				
4x UKS M4X16E					Phillips screw				
UEBD 35-V E	39 mm	105 mm	258 mm	258 mm	261 x 261 mm	32 mm	2 kN	IP 54	2,25 kg
incl.:									
1x UGD3-V 2					rubber seal, square				
4x UKS M4X16E					Phillips screw				
UEBD 45-V E	49 mm	115 mm	258 mm	258 mm	261 x 261 mm	42 mm	2 kN	IP 54	2,51 kg





Product	H	H <sub>min</sub>	B	L	E	T	P <sub>max</sub>	IP <sub>n</sub>	G
incl.:									
1x UGD3-V 2					rubber seal, square				
4x UKS M4X16E					Phillips screw				


## Brass

Product	H	H <sub>min</sub>	B	L	E	T	P <sub>max</sub>	IP <sub>n</sub>	G
UEBD 25-V MS	29 mm	95 mm	258 mm	258 mm	261 x 261 mm	16 mm	2 kN	IP 54	4,97 kg
incl.:									
1x UGD3-V 2					rubber seal, square				
4x UKS M4X16E					Phillips screw				
UEBD 35-V MS	39 mm	105 mm	258 mm	258 mm	261 x 261 mm	26 mm	2 kN	IP 54	5,31 kg
incl.:									
1x UGD3-V 2					rubber seal, square				
4x UKS M4X16E					Phillips screw				

- H:** height
- H<sub>min</sub>:** Minimum installation height
- B:** width
- L:** length
- E:** fitting dimension
- T:** depth
- P<sub>max</sub>:** Maximum load
- IP<sub>n</sub>:** IP protection level in unused condition
- G:** weight

## DETAILS / APPLICATIONS



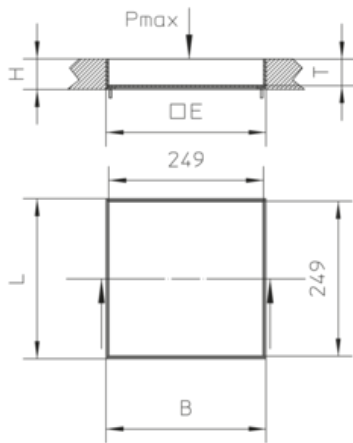

## OPTIONAL ACCESSORIES

UEBDE V, UNE



wet-cleaned

