


## UEBDD V E

stainless steel dummy cover cartridge, triple, angular

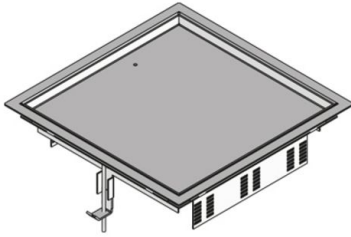

Quadrangular installation unit with high-grade steel carpet protection frame. As cartridge installation frame with dummy inlay cartridge, rubber seal and a universal mounting claw set. For the installation into floor boxes, assembly covers, raised floor/hollow floor openings. Suitable for rooms with dry or wet-cleaned floor covers. Quadrangular installation unit with high-grade steel carpet protection frame. As cartridge installation frame with dummy inlay cartridge, rubber seal and a universal mounting claw set. For the installation into floor boxes, assembly covers and into raised or hollow floor openings. Suitable for rooms with dry and damp-cleaned floor covers. Designed for office traffic loads.

Please mind the technical information in chapter planning.



material	cartridge and frame: 2 mm high-grade steel V2A
type of assembly	Assembly in floor box UBDHB, double or hollow floor openings
application area	dry floor cleaning
protection class	not in use IP 30
norm	according to DIN EN 50085
permits	according to VDE / TÜV
loading	including inspection stamp Ø 13 / 130 mm: 2 / 3 kN


### Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	H <sub>min</sub>	B	L	E	T	P <sub>max</sub>	IP <sub>n</sub>	G
UEBDD 15-V E	72 mm	90 mm	283 mm	283 mm	261 x 261 mm	12 mm	2 kN	IP 30	2,1 kg
incl.:									
1x UGD-V 2					rubber seal, square				
2x UDBS 40-80					special claw				
UEBDD 25-V E	82 mm	100 mm	283 mm	283 mm	261 x 261 mm	22 mm	2 kN	IP 30	2,3 kg
incl.:									
1x UGD-V 2					rubber seal, square				
2x UDBS 40-80					special claw				



**H:** height  
**H<sub>min</sub>:** Minimum installation height  
**B:** width  
**L:** length  
**E:** fitting dimension  
**T:** depth  
**P<sub>max</sub>:** Maximum load  
**IP<sub>n</sub>:** IP protection level in unused condition  
**G:** weight

## DETAILS / APPLICATIONS

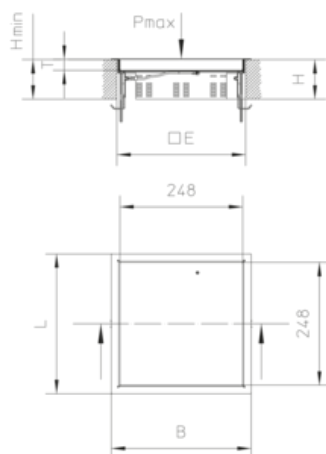

## OPTIONAL ACCESSORIES

UDBS 40-80, UEBDE V



dry-cleaned

