


## UEBDM V WD

stainless steel tube cover unit, triple, angular

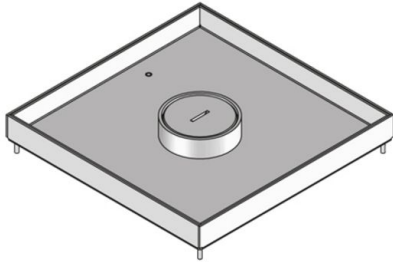

Quadrangular cartridge made of stainless steel sheet with hem. As a levellable cartridge installation frame with a tube outlet cartridge, a screwed-on aluminum tube mounting set and a rubber seal for the installation into floor boxes, assembly covers and raised or hollow floor openings. To accommodate up to 3 mounting boxes equipped with up to 9 suspension bracket installation devices or 12 installation devices of 45x45 mm. Suitable for rooms with wet-cleaned floor covers. Designed for office traffic loads.

Please mind the technical information in chapter planning.



material	cartridge and frame: 2mm high-grade steel V2A, tube mounting set: anodized aluminium
type of assembly	fastening to floor box UBDHB7levelling unit UNE
application area	wet floor cleaning
protection class	in use IP 22 / not in use IP 54
norm	according to DIN EN 50085
permits	according to VDE / TÜV
loading	including inspection stamp Ø 13 / 130 mm: 2 / 3 kN

### Aluminium

Product	H	H <sub>min</sub>	B	L	E	T	P <sub>max</sub>	IP <sub>n</sub>	IP <sub>g</sub>	G
UEBDM 15-V-WD	19 mm	85 mm	258 mm	258 mm	261 x 261 mm	12 mm	2 kN	IP 54	IP 22	1,9 kg
incl.:										
1x UGD3-V 2					rubber seal, square					
4x UKS M4X16E					Phillips screw					
1x UETD-R-WD					tube cover					
UEBDM 25-V-WD	29 mm	95 mm	258 mm	258 mm	261 x 261 mm	22 mm	2 kN	IP 54	IP 22	2,1 kg





Product	H	H <sub>min</sub>	B	L	E	T	P <sub>max</sub>	IP <sub>n</sub>	IP <sub>g</sub>	G
incl.: 1x UGD3-V 2 4x UKS M4X16E 1x UETD-R-WD										
					rubber seal, square Phillips screw tube cover					
UEBDM 35-V-WD	39 mm	105 mm	258 mm	258 mm	261 x 261 mm	32 mm	2 kN	IP 54	IP 22	2,3 kg
incl.: 1x UGD3-V 2 4x UKS M4X16E 1x UETD-R-WD										
					rubber seal, square Phillips screw tube cover					
UEBDM 45-V-WD	49 mm	115 mm	258 mm	258 mm	261 x 261 mm	42 mm	2 kN	IP 54	IP 22	2,6 kg
incl.: 1x UGD3-V 2 4x UKS M4X16E 1x UETD-R-WD										
					rubber seal, square Phillips screw tube cover					

## Aluminium


Product	H	H <sub>min</sub>	B	L	E	T	P <sub>max</sub>	IP <sub>n</sub>	IP <sub>g</sub>	G
UEBDM 25-V-WD MS	29 mm	95 mm	258 mm	258 mm	261 x 261 mm	16 mm	2 kN	IP 54	IP 22	2,1 kg
incl.: 1x UGD3-V 2 4x UKS M4X16E 1x UETD-R-WD										
					rubber seal, square Phillips screw tube cover					
UEBDM 35-V-WD MS	39 mm	105 mm	258 mm	258 mm	261 x 261 mm	26 mm	2 kN	IP 54	IP 22	2,3 kg
incl.: 1x UGD3-V 2 4x UKS M4X16E 1x UETD-R-WD										
					rubber seal, square Phillips screw tube cover					

**H:** height  
**H<sub>min</sub>:** Minimum installation height  
**B:** width  
**L:** length  
**E:** fitting dimension  
**T:** depth



$P_{max}$ : Maximum load  
 $IP_n$ : IP protection level in unused condition  
 $IP_g$ : IP protection level in used condition  
 $G$ : weight

## DETAILS / APPLICATIONS

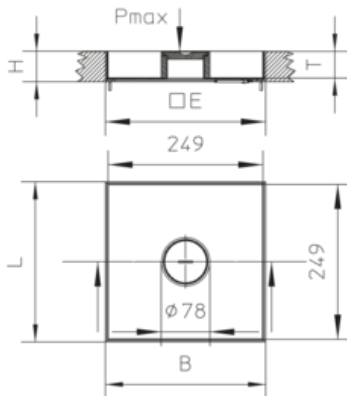

## OPTIONAL ACCESSORIES

UEBDME V, UET WD, UNE



wet-cleaned

