


UEBSESK

end piece, cartridge

End piece cartridge, can be adjusted to floor cover height, for the sealing of screed-flush duct.

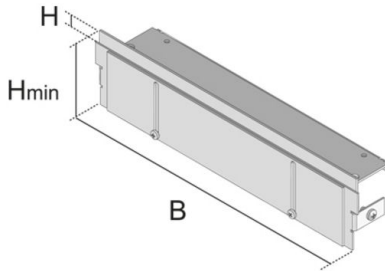

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Product | H | H _{min} | N | B | G |
|-------------------|-------|------------------|-------|--------|---------|
| UEBSESK15 60-20S | 12 mm | 60 mm | 50 mm | 200 mm | 0,57 kg |
| UEBSESK15 60-30S | 12 mm | 60 mm | 50 mm | 300 mm | 0,88 kg |
| UEBSESK15 60-40S | 12 mm | 60 mm | 50 mm | 400 mm | 1,18 kg |
| UEBSESK15 60-50S | 12 mm | 60 mm | 50 mm | 500 mm | 1,38 kg |
| UEBSESK15 100-20S | 12 mm | 100 mm | 50 mm | 200 mm | 0,68 kg |
| UEBSESK15 100-30S | 12 mm | 100 mm | 50 mm | 300 mm | 1,05 kg |
| UEBSESK15 100-40S | 12 mm | 100 mm | 50 mm | 400 mm | 1,42 kg |
| UEBSESK15 100-50S | 12 mm | 100 mm | 50 mm | 500 mm | 1,68 kg |
| UEBSESK25 60-20S | 22 mm | 60 mm | 50 mm | 200 mm | 0,60 kg |
| UEBSESK25 60-30S | 22 mm | 60 mm | 50 mm | 300 mm | 0,93 kg |
| UEBSESK25 60-40S | 22 mm | 60 mm | 50 mm | 400 mm | 1,25 kg |
| UEBSESK25 60-50S | 22 mm | 60 mm | 50 mm | 500 mm | 1,46 kg |
| UEBSESK25 100-20S | 22 mm | 100 mm | 50 mm | 200 mm | 0,71 kg |
| UEBSESK25 100-30S | 22 mm | 100 mm | 50 mm | 300 mm | 1,21 kg |
| UEBSESK25 100-40S | 22 mm | 100 mm | 50 mm | 400 mm | 1,49 kg |
| UEBSESK25 100-50S | 22 mm | 100 mm | 50 mm | 500 mm | 1,76 kg |

H: height
H_{min}: Minimum installation height
N: levelling range
B: width





G: weight

