


## UEBSMSP S

steel sheet side panels

The side panels consisting of two turnable steel sheet profiles in connection with the levelling support provide height adjustment and shuttering of the screed-flush duct.

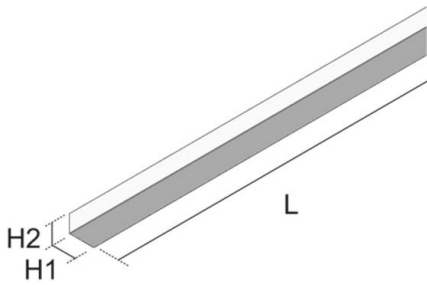

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H1	H2	H <sub>min</sub>	N	L	G
UEBSMSP 60S	48 mm	68 mm	60 mm	50 mm	2000 mm	1,35 kg
UEBSMSP 100S	88 mm	108 mm	100 mm	50 mm	2000 mm	2,29 kg
UEBSMSP 150S	88 mm	138 mm	100 mm	80 mm	2000 mm	2,65 kg
UEBSMSP 180S	88 mm	168 mm	100 mm	110 mm	2000 mm	2,99 kg

**H1:** height

**H2:** height

**H<sub>min</sub>:** Minimum installation height

**N:** levelling range

**L:** length

**G:** weight

## DETAILS / APPLICATIONS



