


UEK3 V

hinged cover unit made of polyamide, triple, angular



Quadrangular installation unit made of polyamide with a carpet protection frame. Lowering of up to 3 mounting boxes (9 x coultter clip installation device or 12 x installation device 45x45 mm) until 30 mm max, hinged cover with sheet steel insert, floor flush brush cable outlet as dust protector, pivoting 180°, and self-locking lever, all-purpose claw set for fastening included. For the installation into floor boxes, assembly covers and into raised or hollow floor openings. Suitable for rooms with dry-cleaned floor coverings up to 10 mm. Designed for office traffic loads.

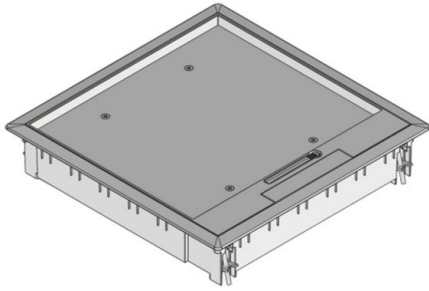

material	Cover and frame: PA6, surface matt finished, steel sheet inlay: 3 mm hot-dip galvanized steel plate
type of assembly	Assembly in floor box UBDHB, double or hollow floor openings
application area	dry floor cleaning
protection class	in use IP 20 / not in use IP 30
norm	according to DIN EN 50085
permits	according to VDE / TÜV
loading	including inspection stamp Ø 13 / 130 mm: 2 / 3 kN


Polyamide

Product	H	H _{min}	B	L	E	T	P _{max}	color	IP _n	IP _g	G
UEK3-V-G	58 mm	63 mm	280 mm	280 mm	260x260 mm	10 mm	2 kN	RAL 7011 (iron grey)	IP 30	IP 20	1,80 kg
incl.:											
4x UDKS3-VR		universal claw for plastic units									
UEK3-V-S	58 mm	63 mm	280 mm	280 mm	260x260 mm	10 mm	2 kN	RAL 9011 (graphite black)	IP 30	IP 20	1,80 kg
incl.:											
4x UDKS3-VR		universal claw for plastic units									



H: height
H_{min}: Minimum installation height
B: width
L: length
E: fitting dimension
T: depth
P_{max}: Maximum load
color:
IP_n: IP protection level in unused condition
IP_g: IP protection level in used condition
G: weight

DETAILS / APPLICATIONS

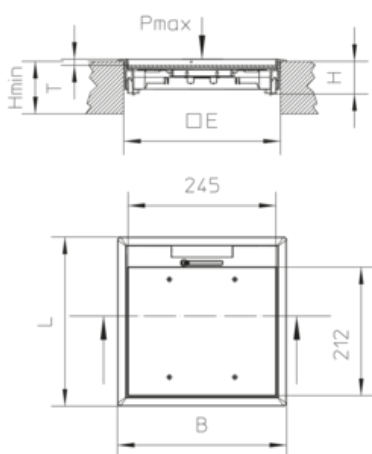

OPTIONAL ACCESSORIES

UDKS3, UEK V, UGEA3, UDKS 40-80, UDKSEB



dry-cleaned

