


UG

mounting box, angular

Mounting box, black, made of plastic, to be latched into an installation unit, consisting of a one-piece cup with strain-relief for incoming cables and a perforated bottom. Suitable for assembly of 3 single or 4 snap-in module installation devices and 2 snap-in device plugs.

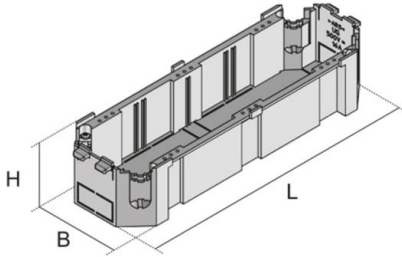

Please mind the technical information in chapter planning.

| | |
|------------------|-------------------------------------|
| material | ABS, surface matt finished |
| type of assembly | registering into installation units |
| norm | according to DIN EN 50085 |
| permits | according to VDE / TÜV |

Acrylonitrile-butadiene-styrene copolymer

| Product | H | B | L | color | installation units/outlet socket | G |
|---------------|-------|-------|--------|---------------------------|----------------------------------|---------|
| UG | 46 mm | 74 mm | 225 mm | RAL 9011 (graphite black) | 3x coulter clip or 4x 45x45mm | 0,09 kg |
| incl.: | | | | | | |
| 4x UGZ | | | | strain relief | | |
| 4x BLS 2.9X32 | | | | tapping screw | | |

H: height

B: width

L: length

color:

installation units/outlet socket: Maximum number of installable installation devices

:

G: weight

OPTIONAL ACCESSORIES

UTG, UA B 226, UA B 113, UA 3, UA 1, UAM 4, UAM 2, UAM 1, UALS 113



