


UGEAV1-2

snap-in ladder set for single-outlet cartridge, double, angular

Installation frame for installation in single outlet, to hold a circuit board UGET1-2 UG-R and UGR 1-4 resp.

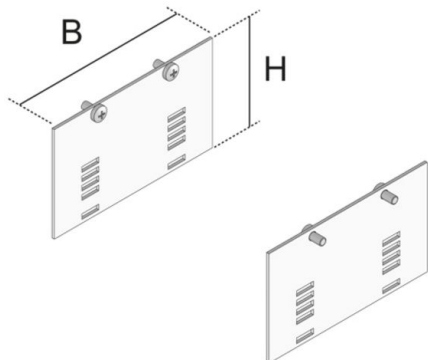

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	lock-in range	G
UGEAV1-2 50S	59 mm	98 mm	25 mm	0,13 kg
UGEAV1-2 80S	83,4 mm	98 mm	25 mm	0,19 kg

H: height
B: width
lock-in range:
G: weight

