


UGWIS-FILS16A

mounting box pre-assembled with FI/LS switch 16 A, Wieland

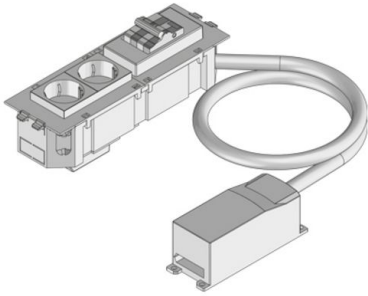

Pre-assembled mounting box with a FI/LS switch 6 KA, 1 p?+?N, 16 A/30 mA, connected to a connecting cable 3x4 mm² with flat cable adapter 400 V/32 A for tapping the flat cable 5G10 mm², coded on L1. Complete with a 3 pole Wieland snap-in device socket under the device casing and a double outlet.

Acrylonitrile-butadiene-styrene copolymer

Product	H	B	L	KQ	connector lead	G
UGWIS-W2FILS16A-300	83 mm	74 mm	225 mm	4 mm ²	3000 mm	1,93 kg
UGWIS-O2FILS16A-300	83 mm	74 mm	225 mm	4 mm ²	3000 mm	1,93 kg
UGWIS-W2FILS16A-200	83 mm	74 mm	225 mm	4 mm ²	2000 mm	1,67 kg
UGWIS-O2FILS16A-200	83 mm	74 mm	225 mm	4 mm ²	2000 mm	1,67 kg

H: height

B: width

L: length

KQ: cable diameter

:

connector lead: Connecting cable in mm

G: weight

:

