


UKDA 260R

cable duct assembly cover, double, round

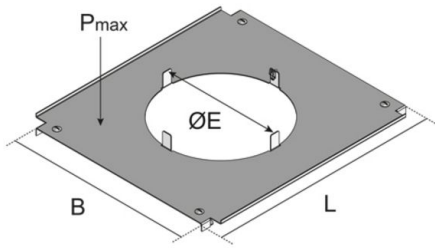

Assembly covers made of Sendzimir galvanized sheet steel for applying to the side profile of the bottom part of the cable duct including turning bolt. Usable as pull- and installation box, with one opening for insertion of a shuttering unit that will be replaced with a round assembly unit during final assembly.

| | |
|------------------|---|
| material | sheet steel, hot-dip galvanized |
| type of assembly | catch mechanism on cable duct bottom part UKR |
| application area | screed-covered duct system |
| norm | according to DIN EN 50085 |
| permits | according to VDE / TÜV |

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Product | B | L | E | P _{max} | mounting box | G |
|---------------|--------|--------|-----------------|------------------|--------------|---------|
| UKDA-260R 30S | 300 mm | 420 mm | 260 mm | 0,75 kN | 2 | 1,23 kg |
| incl.: | | | | | | |
| 1x UBDHB-Z | | | grounding clamp | | | |
| UKDA-260R 40S | 400 mm | 495 mm | 260 mm | 0,75 kN | 2 | 2,14 kg |
| incl.: | | | | | | |
| 1x UBDHB-Z | | | grounding clamp | | | |
| UKDA-260R 50S | 500 mm | 595 mm | 260 mm | 0,75 kN | 2 | 4,47 kg |
| incl.: | | | | | | |
| 1x UBDHB-Z | | | grounding clamp | | | |

B: width

L: length

E: fitting dimension

P_{max}: Maximum load

mounting box: Maximum number of installable device casings.





G: weight

OPTIONAL ACCESSORIES

USR, UBDEL

