


## UKE260 V

stainless steel hinged cover compact single-outlet, twelfold, angular



Consisting of floor box inclusive square single outlet and shuttering formwork, as concealed shuttering for direct installation in floor screed. as a height-adjustable cartridge installation frame with cable outlet cartridge, hem, self-locking opening lever, floor-flush cable outlet and rubber seal to accommodate up to 12 installation devices, 45x45mm. With perforations on the side panels for the introduction of tubes M25. Suitable for rooms with dry and damp-cleaned floor covers. Designed for office traffic loads.



norm	according to DIN EN 50085
permits	according to VDE / TÜV


### Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	H <sub>min</sub>	N	B	L	E	T	P <sub>max</sub>	IP <sub>n</sub>	IP <sub>g</sub>	G
UKE260 15-V E	15 mm	90 mm	35 mm	258 mm	258 mm	264 x 264 mm	12 mm	2 kN	IP 30	IP 20	3,83 kg
UKE260 25-V E	25 mm	100 mm	35 mm	258 mm	258 mm	264 x 264 mm	22 mm	2 kN	IP 30	IP 20	4,2 kg

**H:** height  
**H<sub>min</sub>:** Minimum installation height  
**N:** levelling range  
**B:** width  
**L:** length  
**E:** fitting dimension  
**T:** depth  
**P<sub>max</sub>:** Maximum load  
**IP<sub>n</sub>:** IP protection level in unused condition  
**IP<sub>g</sub>:** IP protection level in used condition  
**G:** weight



## DETAILS / APPLICATIONS

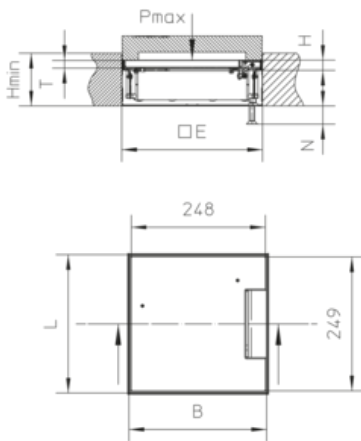

## OPTIONAL ACCESSORIES

UG3, UKENP 260



dry-cleaned

