


## UKL

### screed-covered duct, 3-compartment

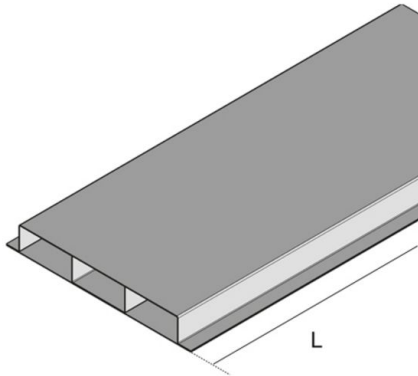

3-compartment duct as a closed rectangular profile made of Sendzimir hot-dip galvanized sheet steel with two separating strips. Top and bottom piece are firmly connected with each other and have integrated drillings in the side seam.

material	sheet steel, hot-dip galvanized
type of assembly	Mounting on raw concrete ceiling
application area	screed-covered duct system
norm	according to DIN EN 50085
permits	according to VDE / TÜV

#### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	B1	B2	L	P <sub>max</sub>	G
UKL 3-28-250S	28 mm	250 mm	82 mm	84 mm	3000 mm	0,75 kN	17,9 kg
UKL 3-28-350S	28 mm	350 mm	116 mm	116 mm	3000 mm	0,75 kN	23,3 kg
UKL 3-38-250S	38 mm	250 mm	82 mm	84 mm	3000 mm	0,75 kN	18,7 kg
UKL 3-38-350S	38 mm	350 mm	116 mm	116 mm	3000 mm	0,75 kN	24,2 kg
UKL 3-48-250S	48 mm	250 mm	82 mm	84 mm	3000 mm	0,75 kN	19,7 kg
UKL 3-48-350S	48 mm	350 mm	116 mm	116 mm	3000 mm	0,75 kN	25,1 kg

**H:** height

**B:** width

**B1:** width

**B2:** width


**L:** length

**P<sub>max</sub>:** Maximum load

**G:** weight



## DETAILS / APPLICATIONS

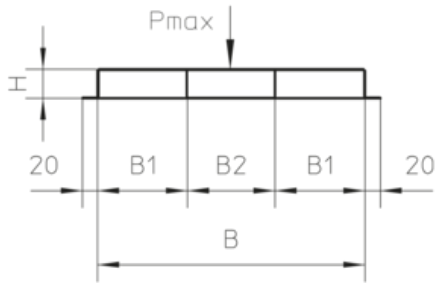

## OPTIONAL ACCESSORIES

UB, UGKB, UN

