


USK

shuttering unit, angular

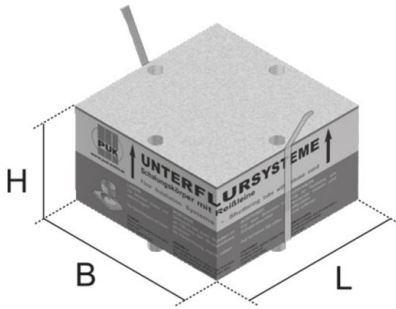

Shuttering formwork made of plastic-coated airpop® (polystyrene) with integrated ripcord, as permanent shuttering. Creates a fixed unit with floor box after insertion into opening on cover sheet.

Caution: insulation strip of max. thickness of 2 mm!
Hexabromocyclododecane (HBCD) free!

material	plastic-coated airpop® (polystyrene)
type of assembly	in hollow space floor box UBDHB or assembly cover UKDA
application area	screed-covered duct system
norm	according to DIN EN 50085
permits	according to VDE / TÜV

Product	H	B	L	E	G
USK 160V-150	150 mm	163 mm	163 mm	165x165 mm	0,08 kg
USK 185V-150	150 mm	262 mm	186 mm	187x262 mm	0,16 kg
USK 259V-150	150 mm	262 mm	262 mm	262X262 mm	0,19 kg
USK 259V-225	225 mm	262 mm	262 mm	262X262 mm	0,24 kg

H: height
B: width
L: length
E: fitting dimension
G: weight

