


VB-BS

connection plate Maintenance of function - Standard support structures

The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

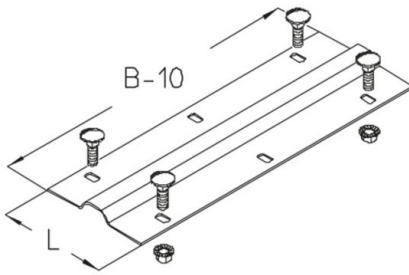

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	B	L	G
VB-BS 10S	100 mm	99 mm	0,10 kg
incl.: 1x KLR	clamp fastening set		
VB-BS 20S	200 mm	99 mm	0,21 kg
incl.: 2x KLR	clamp fastening set		
VB-BS 30S	300 mm	99 mm	0,31 kg
incl.: 2x KLR	clamp fastening set		

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	B	L	G
VB-BS 10F	100 mm	99 mm	0,10 kg
incl.: 1x KLR E	clamp fastening set		
VB-BS 20F	200 mm	99 mm	0,23 kg
incl.: 2x KLR E	clamp fastening set		
VB-BS 30F	300 mm	99 mm	0,33 kg



Product	B	L	G
incl.: 2x KLR E			
	clamp fastening set		

B: width
L: length
G: weight

DETAILS / APPLICATIONS

