


WPRL

reducer, left, height = 100 mm

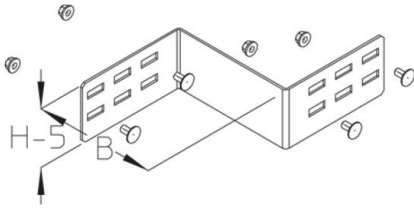

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	G
WPRL10-10-HDG	100 mm	100 mm	1,28 kg
incl.: 4x KLS 10X20-HDG clamp fastening set			
WPRL10-20-HDG	100 mm	200 mm	1,52 kg
incl.: 4x KLS 10X20-HDG clamp fastening set			
WPRL10-30-HDG	100 mm	300 mm	1,75 kg
incl.: 4x KLS 10X20-HDG clamp fastening set			

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	G
WPRL10-10-304	100 mm	100 mm	1,27 kg
incl.: 4x KLS 10X20-304 clamp fastening set			
WPRL10-20-304	100 mm	200 mm	1,52 kg
incl.: 4x KLS 10X20-304 clamp fastening set			
WPRL10-30-304	100 mm	300 mm	1,75 kg





Product	H	B	G
incl.: 4x KLS 10X20-304			clamp fastening set

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	H	B	G
WPRL10-10-316	100 mm	100 mm	1,27 kg
incl.: 4x KLS 10X20-316			clamp fastening set
WPRL10-20-316	100 mm	200 mm	1,52 kg
incl.: 4x KLS 10X20-316			clamp fastening set
WPRL10-30-316	100 mm	300 mm	1,75 kg
incl.: 4x KLS 10X20-316			clamp fastening set

H: height
B: width
G: weight

