


WPTP 60

wide-span branch, height = 60 mm

wide-span cable ladder branch shaped form as T-piece with integrated connectors

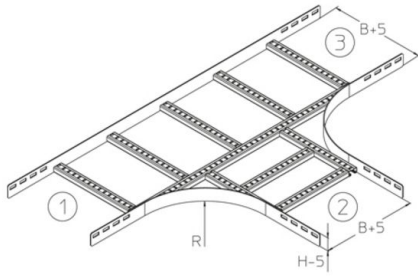

Welded construction. Formed components must be supported at all sides. Dissymmetric branches on request.

Branches with higher width/ radius are delivered as two pieces including coupling bolts.

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	R	G
WPTP06-15-30-HDG	60 mm	150 mm	300 mm	7,12 kg
incl.:				
6x SEM 8-304	hexagon-nut, DIN 934			
6x FRSV 8X16-304	round-head screw with short square, DIN 603			
WPTP06-20-30-HDG	60 mm	200 mm	300 mm	7,71 kg
incl.:				
6x SEM 8-304	hexagon-nut, DIN 934			
6x FRSV 8X16-304	round-head screw with short square, DIN 603			
WPTP06-30-30-HDG	60 mm	300 mm	300 mm	8,57 kg
incl.:				
6x SEM 8-304	hexagon-nut, DIN 934			
6x FRSV 8X16-304	round-head screw with short square, DIN 603			
WPTP06-40-30-HDG	60 mm	400 mm	300 mm	9,99 kg
incl.:				
6x SEM 8-304	hexagon-nut, DIN 934			
6x FRSV 8X16-304	round-head screw with short square, DIN 603			
WPTP06-60-30-HDG	60 mm	600 mm	300 mm	12,85 kg
incl.:				
6x SEM 8-304	hexagon-nut, DIN 934			
6x FRSV 8X16-304	round-head screw with short square, DIN 603			

H: height
B: width
R: radius





G: weight

